


台恩耐腐蚀泵制造(上海)有限公司 TAIEN
www.pumps.tw.cn
Model: PP/PVDF-21FF
Air pressure(bar): 2-7 Capacity(l/min): 75
Ser No.: 8621221004

WARNING
To reduce risk of serious injury:
• Before dismantle, relieve compressed air and fluid pressure.
• Equipment must be grounded.
• During operation, always wear personal protection equipment.
• Pumped fluid must be compatible with pump material.
• Discharge exhaust air properly if discharging
liquids; fluid will be exhausted with air
through the exhaust port.
• Read operation manual before operating.

WARNING
To reduce risk of serious injury:
• Before dismantle, relieve compressed air and fluid pressure.
• Equipment must be grounded.
• During operation, always wear personal protection equipment.
• Pumped fluid must be compatible with pump material.
• Discharge exhaust air properly if discharging
liquids; fluid will be exhausted with air
through the exhaust port.
• Read operation manual before operating.

DN10 PP、PVDF 台恩

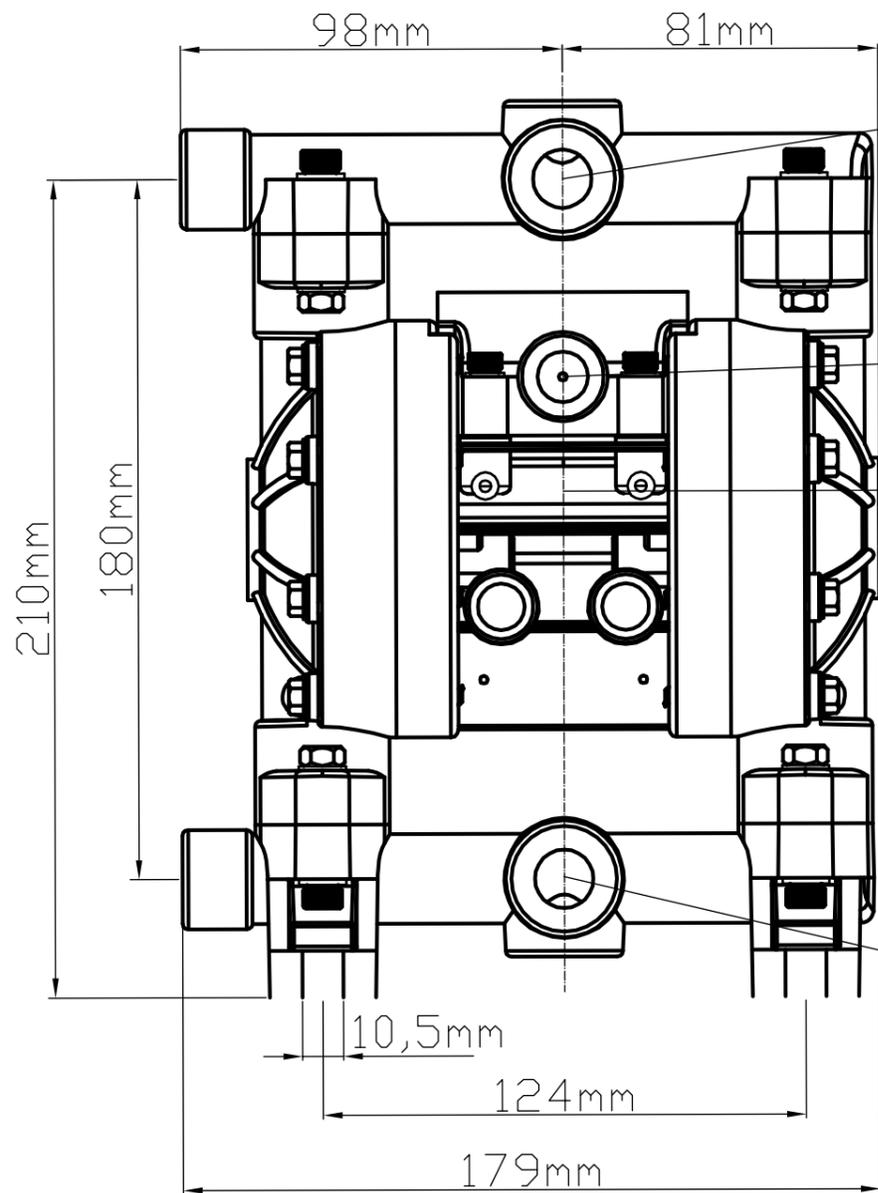

流体出口 1/4" BSPT


流体出口 3/8" BSPT

气源入口 1/4" BSPT

气源出口 1/4" BSPT
(后面)

流体入口 3/8" BSPT

流体入口 1/4" BSPT

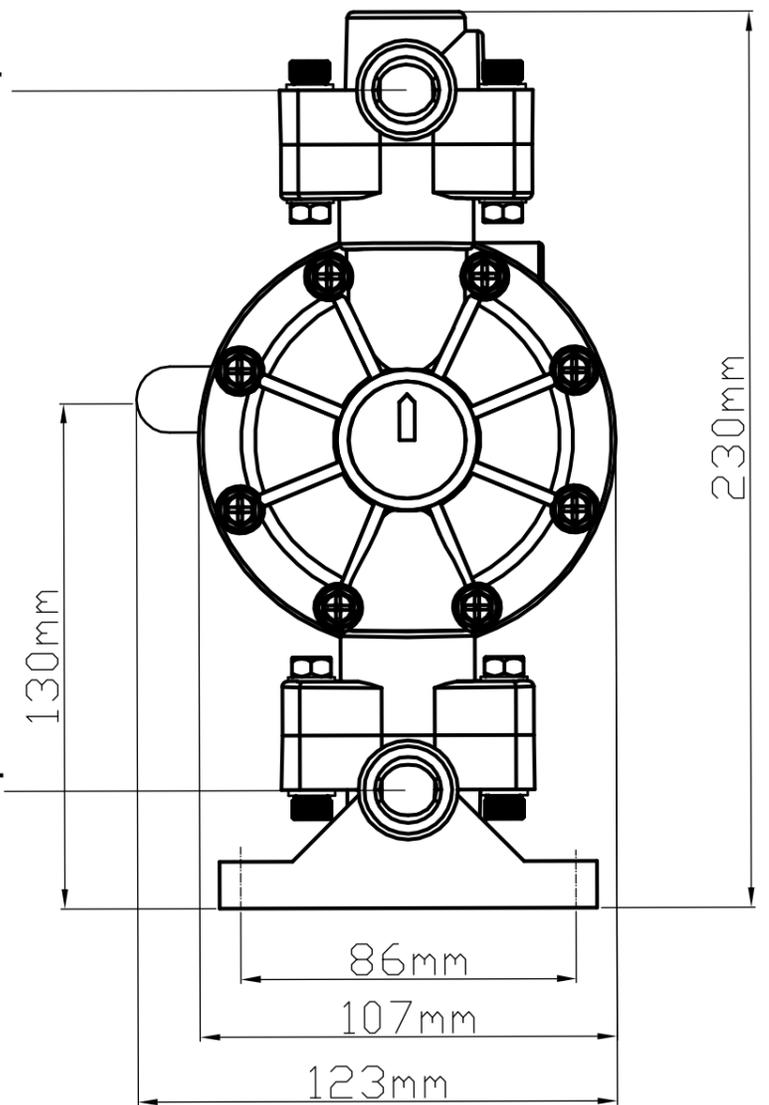

PDP10-PP、PVDF-PTFE; PP、PVDF塑料气动隔膜泵浦

最大流量: 25升/分钟(1.6立方/小时)

最高扬程: 83m, (8.3kg)

自吸高度: 0.5m(干吸)、1m(湿吸)

物料口径: 2分、3分(G1/4"、3/8")内螺纹

气源入口: 2分(G1/4")内螺纹

驱动气压: 0.5~5kg

气体消耗: 250升/分钟

过流材质: PP塑料、PVDF氟塑料

膜片材质: PTFE(物料侧)、三道橡胶(驱动气源侧, 不接触物料)


球体材质: PTFE

球座材质: PP


气阀材质: PP(不接触物料)

通过颗粒: ≤2mm

泵体重量: 1.5、2kg

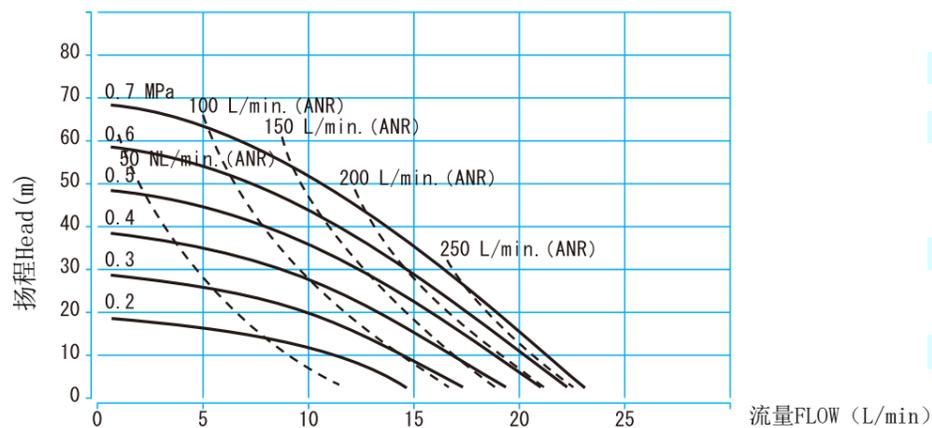

				台恩耐腐蚀泵(上海)公司				
				DN10				
				PP、PVDF泵壳(PP气阀)				
标记	处数	更改文件号	签字	日期	图样标记	数量	重量(kg)	比例
设计			标准化					
校对			审定					
审核			日期					
工艺			纸张		共 页	第 页		

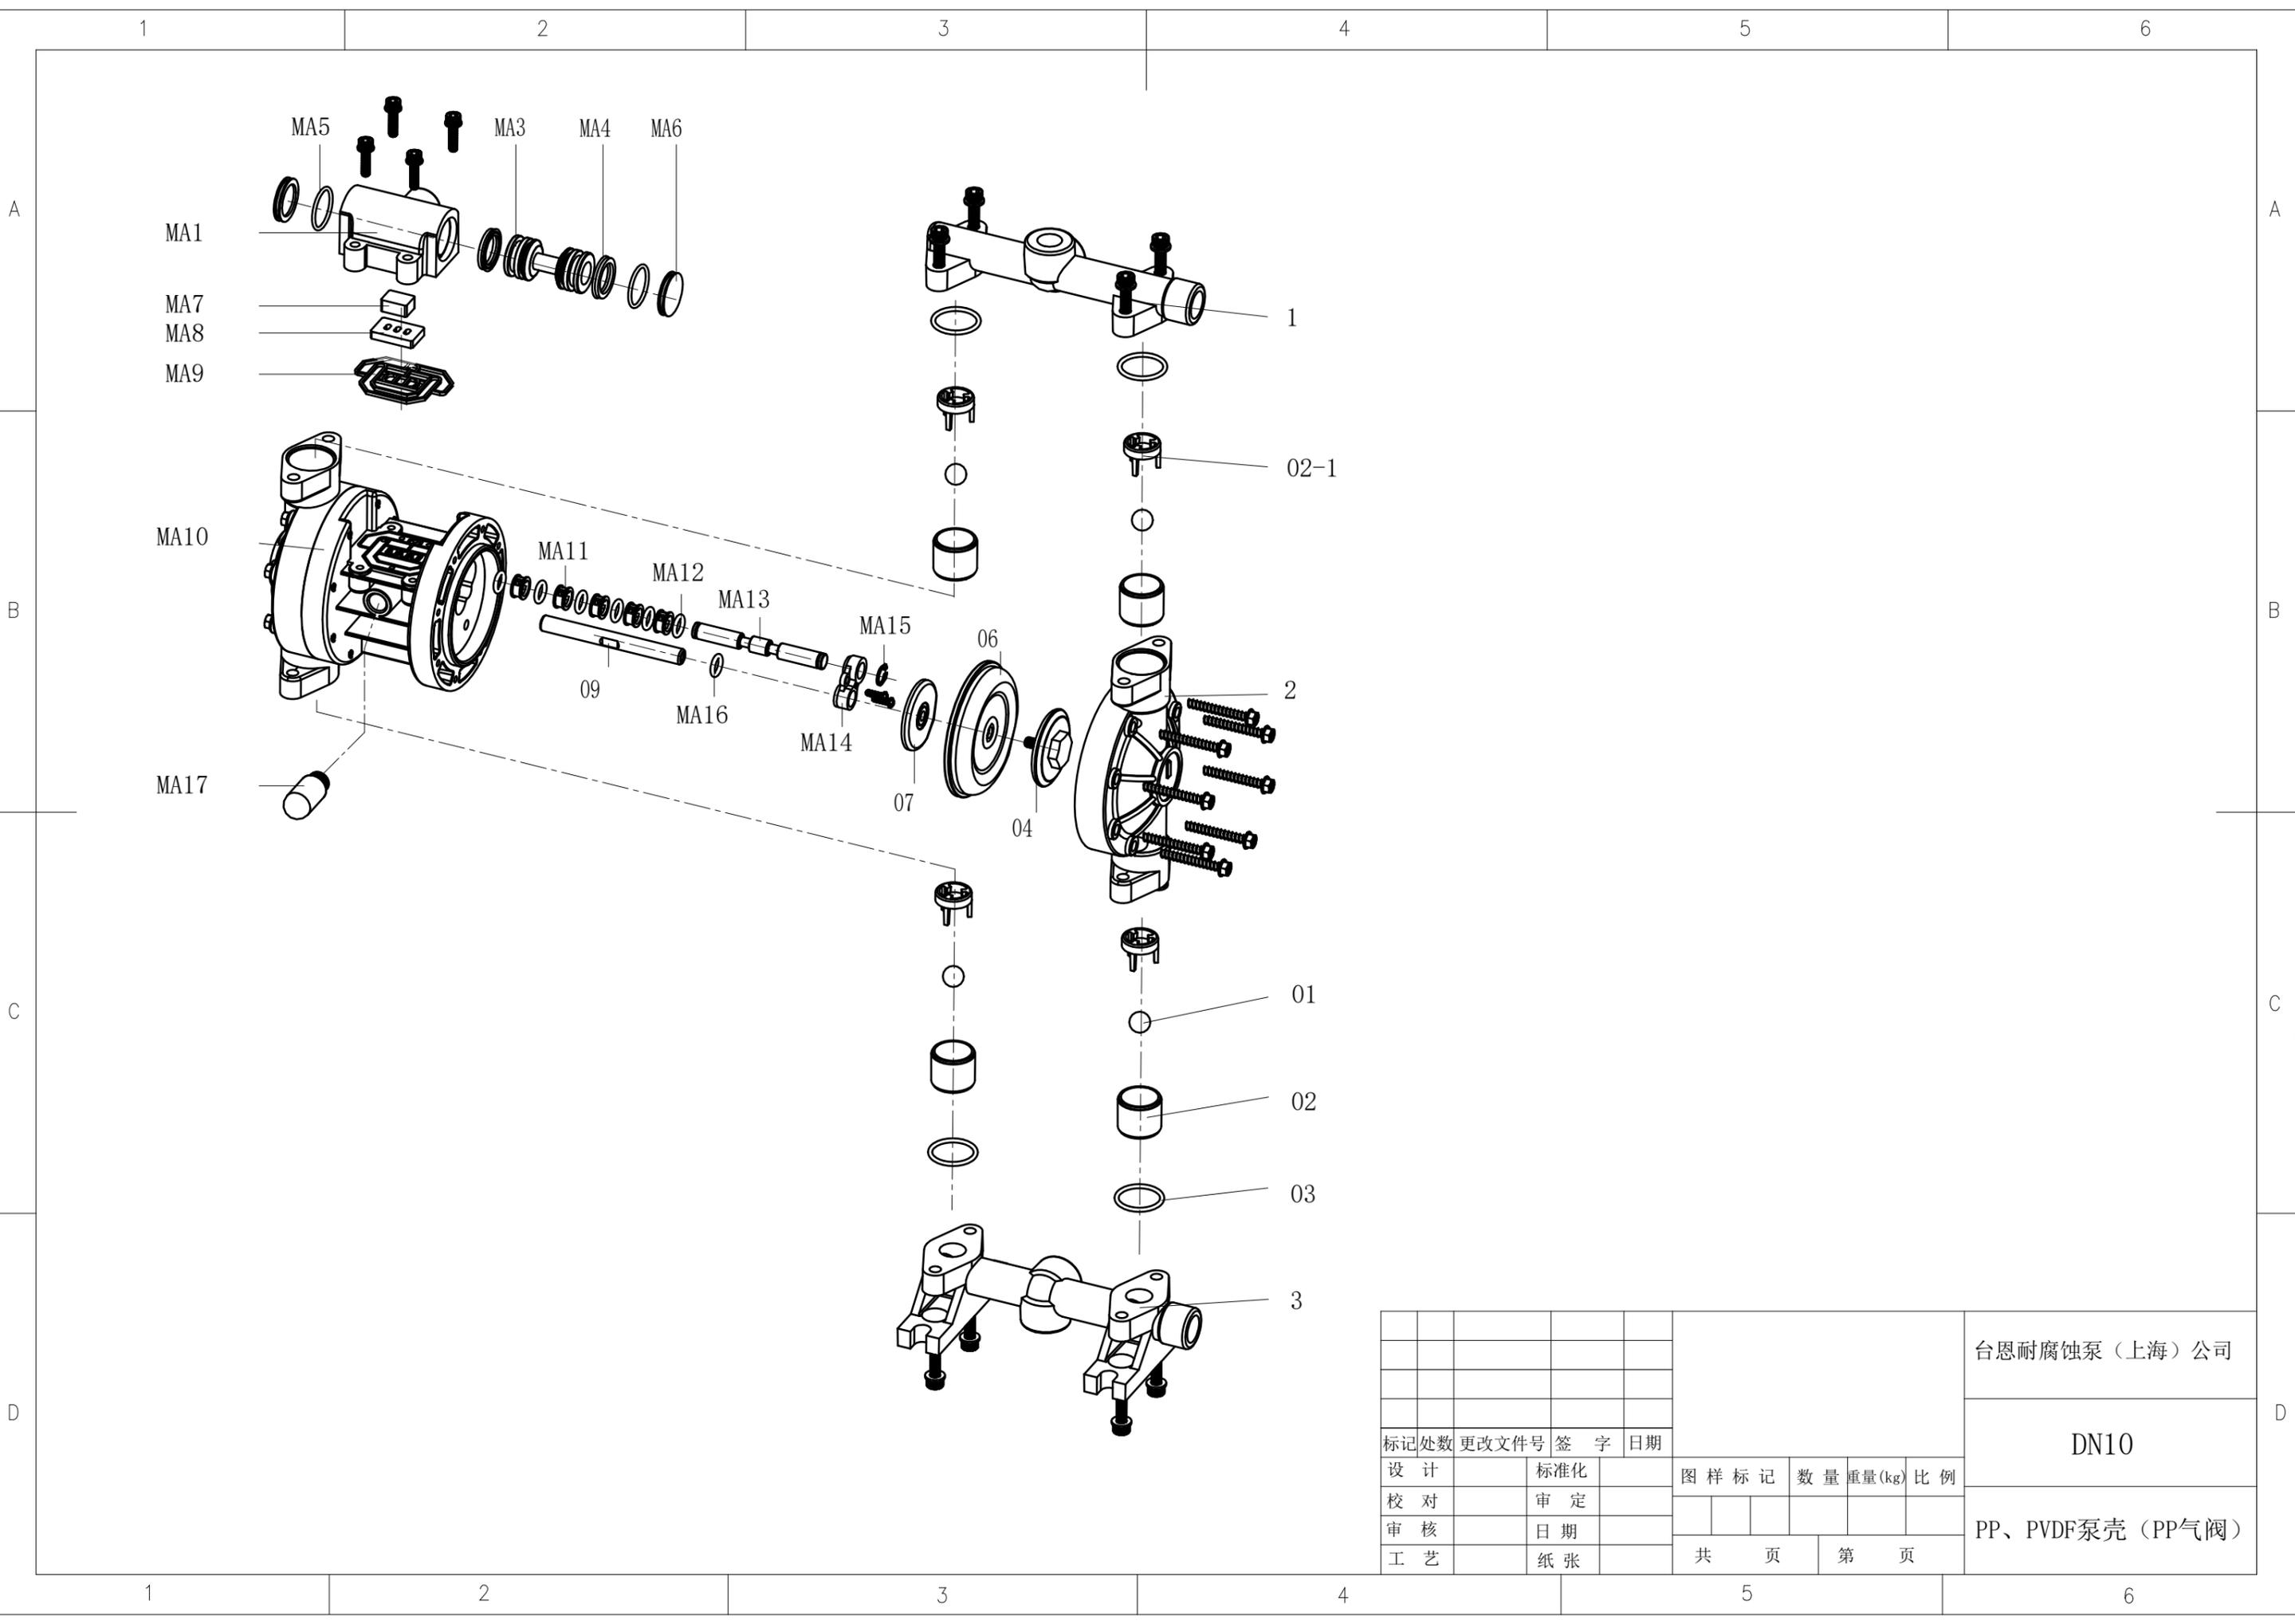

				台恩耐腐蚀泵（上海）公司				
				DN10				
				PP、PVDF泵壳（PP气阀）				
标记	处数	更改文件号	签字	日期	图样标记	数量	重量(kg)	比例
设计			标准化					
校对			审定					
审核			日期					
工艺			纸张		共 页	第 页		